



Unused: R4, R5, C10, C12, C13, D2, D3, D4, D5

ALL COMPONENTS TO BE PLACED ON FRONT SIDE OF PCB

NOTE: RESISTORS ARE IN OHMS +/- 5% AND CAPACITORS ARE IN MICROFARADS +/- 20% UNLESS OTHERWISE NOTED. SEE BOM FOR ACTUAL VOLTAGE AND SPECIFICATION.



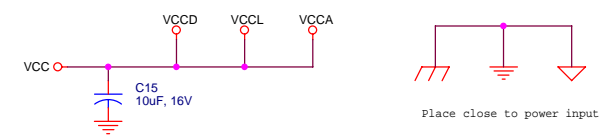

GRAND
idea studio

TITLE			
Parallax RFID Card Reader, Serial (#28140)			
DATE	SIZE	DRAWN BY	REV
Friday, December 07, 2007	B	SHT 1 OF 1	J. Grand C

DISTRIBUTED UNDER A CREATIVE COMMONS ATTRIBUTION 3.0 US LICENSE